
# Royal series





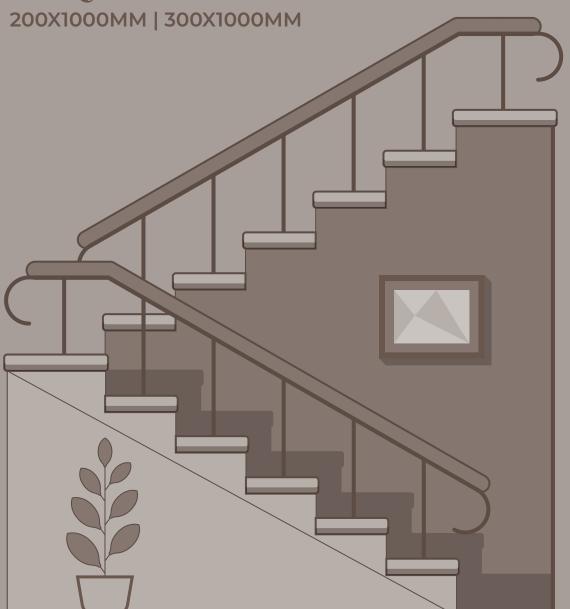

Highly durable, ideal for heavy traffic and commercial areas indoors and outdoors.


Easy and speedy installation. Better than natural stone cutting and finishing on site.

Embossed capsule lines provide extra grip for enhanced safety near the step edge and unique full bull nose edges.

It provides higher strength and durability and offers assurance to replace natural stones in a confident way with the highest abrasion resistance.

Ensures ten times superior surface protection against wear and tear over natural stones.

#### **Available Sizes:**

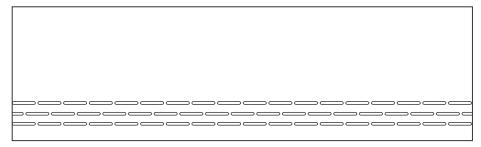

#### STEP - 300X1000MM



#### THICKNESS: 10MM

Steps are available in 300x1000mm.

These can be used in full size and cut size,
depending on the requirement. While the riser
tiles are available in the convenient
size of 200x1000mm









#### 200X1000MM | 300X1000MM

|--|

**ROYAL WHITE - (RISER)** 




**ROYAL WHITE - (STEP)** 








# 200X1000MM | 300X1000MM

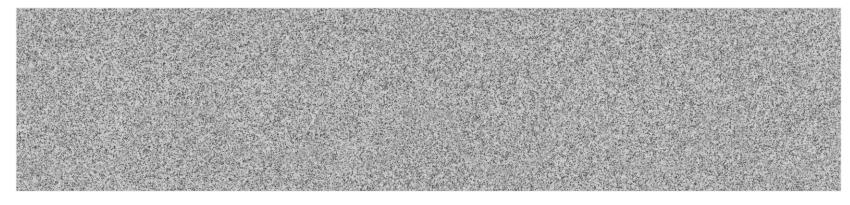

**ROYAL GREY - (RISER)** 

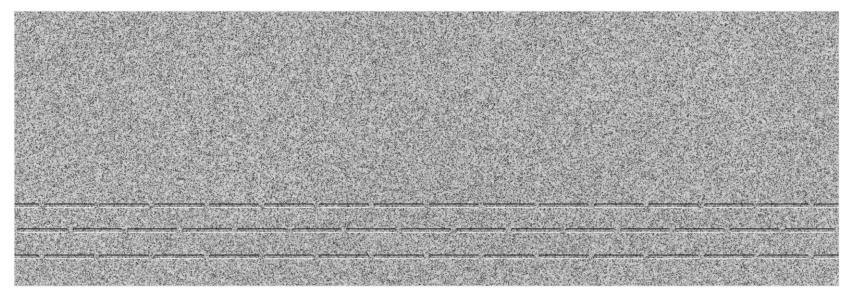

**ROYAL GREY- (STEP)** 







# 200X1000MM | 300X1000MM



**ROYAL COOKIE - (RISER)** 




**ROYAL COOKIE - (STEP)** 







#### 200X1000MM | 300X1000MM

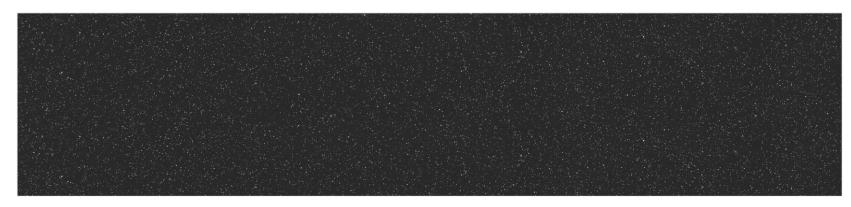

**ROYAL BLACK - (RISER)** 



**ROYAL BLACK - (STEP)** 








#### 200X1000MM | 300X1000MM



**ROYAL BROWN - (RISER)** 




**ROYAL BROWN - (STEP)** 

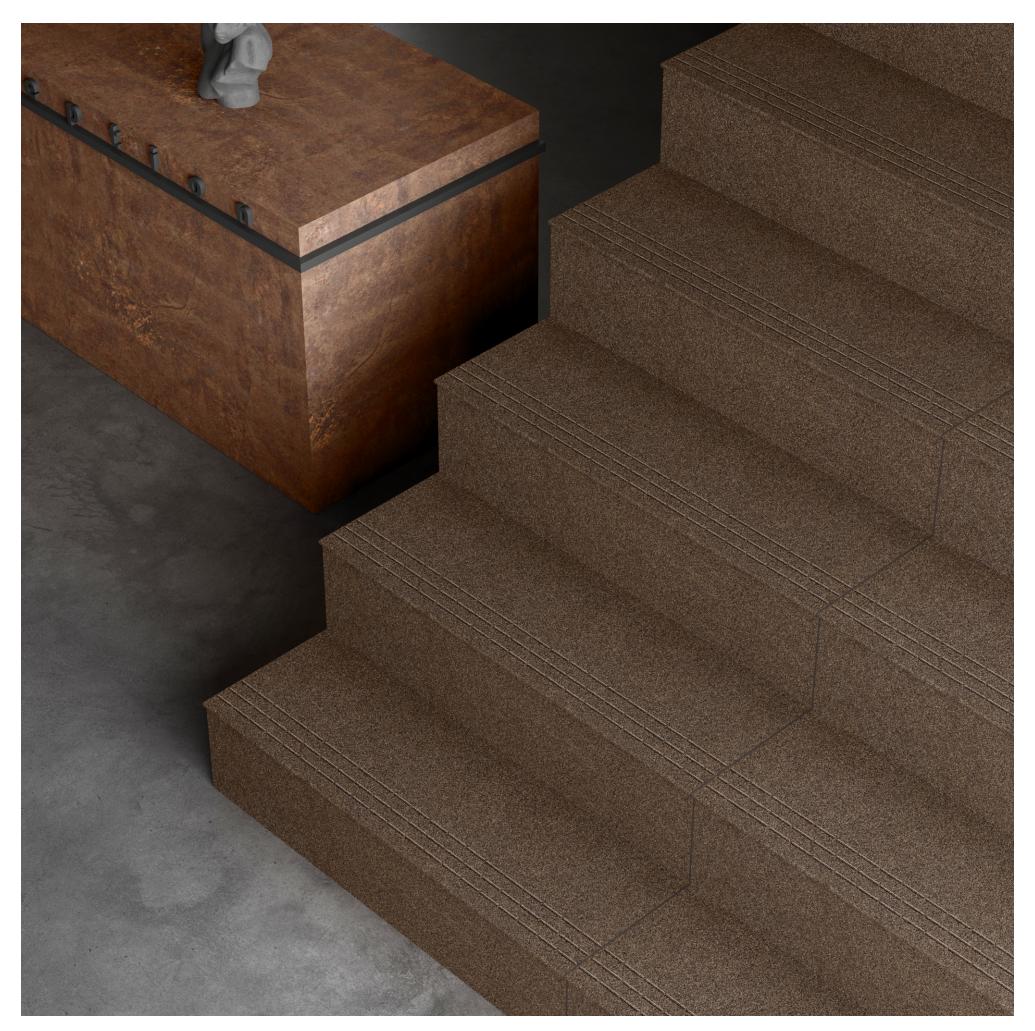






#### 200X1000MM | 300X1000MM

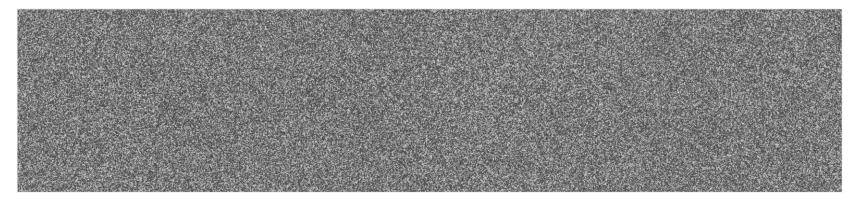

**ROYAL NERO - (RISER)** 

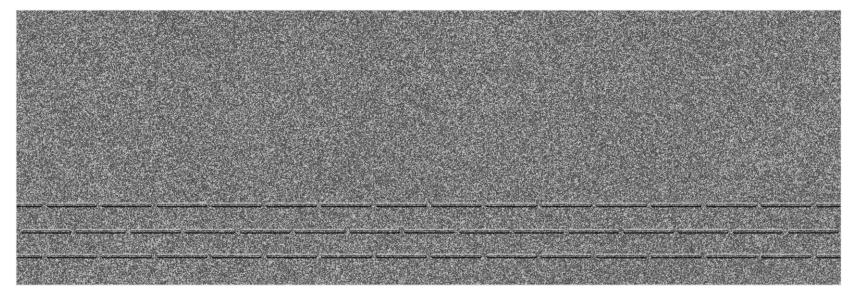

**ROYAL NERO - (STEP)** 







# 200X1000MM | 300X1000MM

| DOVAL REIGE - (DISED) |  |
|-----------------------|--|



**ROYAL BEIGE - (STEP)** 



#### **TECHNICAL SPECIFICATION**

| TECHNICAL DETAILS                       | STANDARD AS PER<br>ISO-13006/EN176<br>GROUP Bla | MEAN VALUE OF<br>OUR FULL BODY<br>VITRIFIED TILES | METHOD<br>OF TEST |
|---|---|---|-------------------|
| Deviation In Length & Width             | ±0.60%  | ±0.10%  | ISO-10545-2       |
| Deviation In Thickness                  | ±5.00%  | ±2.00%  | ISO-10545-2       |
| Straightness Of Sides                   | ±0.50%  | ±0.10%  | ISO-10545-2       |
| Rectangularity                          | ±0.60%  | ±0.10%  | ISO-10545-2       |
| Surface Flatness                        | ±0.50%  | ±0.10%  | ISO-10545-2       |
| Glossiness                              | Gloss Meter                                     | Min. 90%  | Glossmeter        |
| Water Absorption                        | ≤0.50%  | E≤0.05%   | ISO-10545-3       |
| Breaking Strength                       | king Strength 1300 N 2000                       |   | ISO-10545-4       |
| Abrasion Resistance                     | Max. 175mm³                                     | Max. 145mm³                                       | ISO-10545-6       |
| Moh's Hardness                          | Min. 6  | ≥ 6*  | EN 101            |
| Frost Resistance                        | Frost Proof                                     | Frost Proof                                       | ISO-10545-12      |
| Thermal Shock                           | No Damage                                       | No Damage   | ISO-10545-9       |
| Moisture Expansion                      | Nill  | Nill  | ISO-10545-10      |
| Thermal Expansion                       | <9x10 <sup>-6</sup>                             | ≥ 6 x 10 <sup>-6</sup>                            | ISO-10545-8       |
| Resistance of House Hold Chemical       | No Damage                                       | No Damage   | ISO-10545-13      |
| Stain Resistance                        | Resistance Resistance                           |   | ISO-10545-14      |
| Slip Resistance (friction Co Efficient) | tion Co Efficient) > 0.40 > 0.40                |   | ISO-10545-17      |

We reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors of tiles shown in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.

#### **PACKING DETAILS**

| FULL BODY STEP AND RISER 5ft. |           |         |         |  |  |
|-------------------------------|-----------|---------|---------|--|--|
| SIZE                          | Sq.Ft.    | Packing | Weight  |  |  |
| 200X1000MM                    | 6.45 sqft | 3 pcs   | 12.9 kg |  |  |
| 300X1000MM                    | 9.69 sqft | 3 pcs   | 19.3 kg |  |  |



#### **VIDEX CERAMICO**

Sr. No. 159p1/p2, B/h Ambika Showroom, Nr. Anita Ceramic, Pipli Road, Bela Rangpar Morbi.

Mo.: +91 99790 44499