Fyneen Series



Highly durable, ideal for heavy traffic and commercial areas indoors and outdoors.


Easy and speedy installation. Better than natural stone cutting and finishing on site.

Embossed capsule lines provide extra grip for enhanced safety near the step edge and unique full bull nose edges.

It provides higher strength and durability and offers assurance to replace natural stones in a confident way with the highest abrasion resistance.

Ensures ten times superior surface protection against wear and tear over natural stones.

Available Sizes:

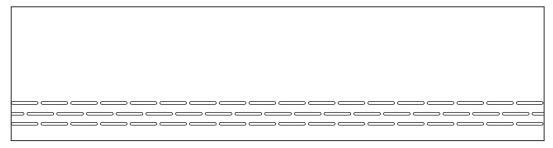

STEP - 300X1200MM



THICKNESS: 10MM

Steps are available in 300x1200mm.
These can be used in full size and cut size,
depending on the requirement. While the riser
tiles are available in the convenient
size of 200x1200mm





200X1200MM | 300X1200MM

LUXURY TAJ (RISER)			

LUXURY TAJ (STEP)



LUXURY TAJ



200X1200MM | 300X1200MM

LUXURY CREMA (RIS	SER)		
			, <u> </u>

LUXURY CREMA (STEP)



LUXURY CREMA



200X1200MM | 300X1200MM

LUXURY SKYLINE (RISER)			
	· · · · · · · · · · · · · · · · · · ·	 	

LUXURY SKYLINE (STEP)



LUXURY SKYLINE



200X1200MM | 300X1200MM



LUXURY BLACK (RISER)



LUXURY BLACK (STEP)





200X1200MM | 300X1200MM

LUXURY KOTA (RISER)




LUXURY KOTA (STEP)




LUXURY KOTA




200X1200MM | 300X1200MM

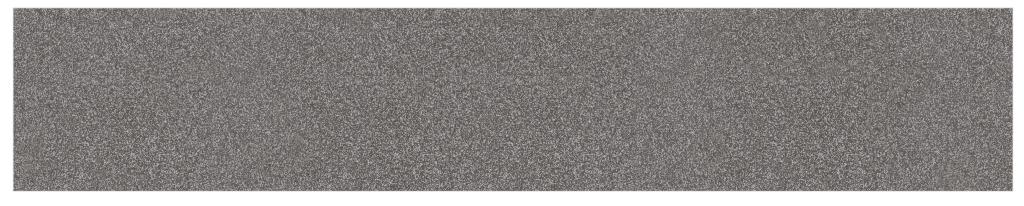

LUXURY GREY (RISER)

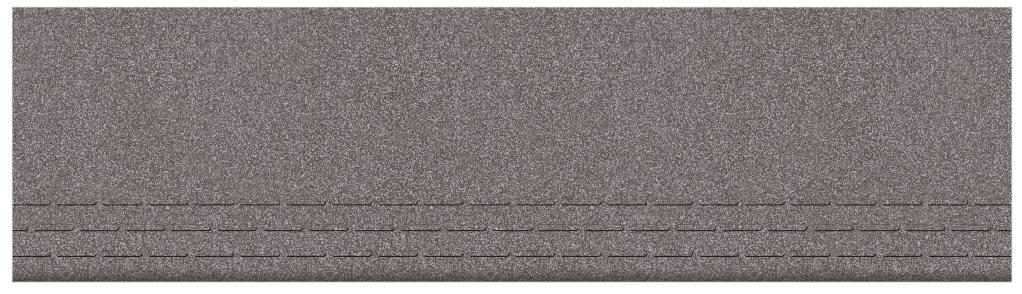

LUXURY GREY (STEP)

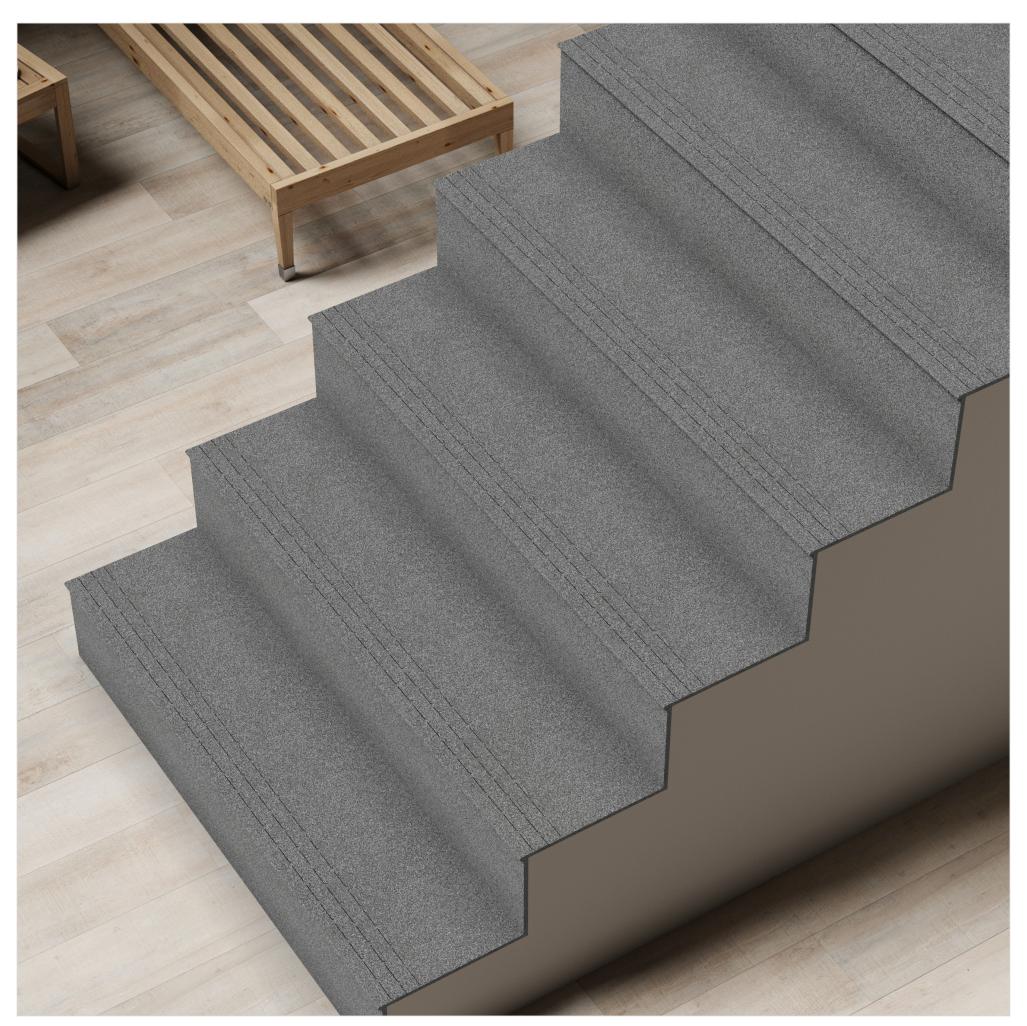



READ	Υ	TO	INS	TALI	_
STEP	&	RIS	SER		

200X1200MM | 300X1200MM

LUXUR	Y WHITE	(RISER)					

LUXURY WHITE (STEP)





200X1200MM | 300X1200MM



LUXURY BROWN (RISER)



LUXURY BROWN (STEP)



LUXURY BROWN

TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP Bla	MEAN VALUE OF OUR FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	±0.60%	±0.10%	ISO-10545-2
Deviation In Thickness	±5.00%	±2.00%	ISO-10545-2
Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
Rectangularity	±0.60%	±0.10%	ISO-10545-2
Surface Flatness	±0.50%	±0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossmeter
Water Absorption	≤0.50%	E≤0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm³	Max. 145mm³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN 101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nill	Nill	ISO-10545-10
Thermal Expansion	<9x10 ⁻⁶	≥ 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance (friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

We reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors of tiles shown in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.

PACKING DETAILS

FULL BODY STEP AND RISER 5ft.						
SIZE	AREA/BOX	Packing	Weight			
200X1200MM	0.72 Sq. Mtr.	3 Pcs	15 kg			
300X1200MM	1.08 Sq. Mtr.	3 Pcs	22.5 kg			