


READY TO INSTALL STEP & RISER

200X900MM | 300X900MM

VIDEX
— STEP & RISER —



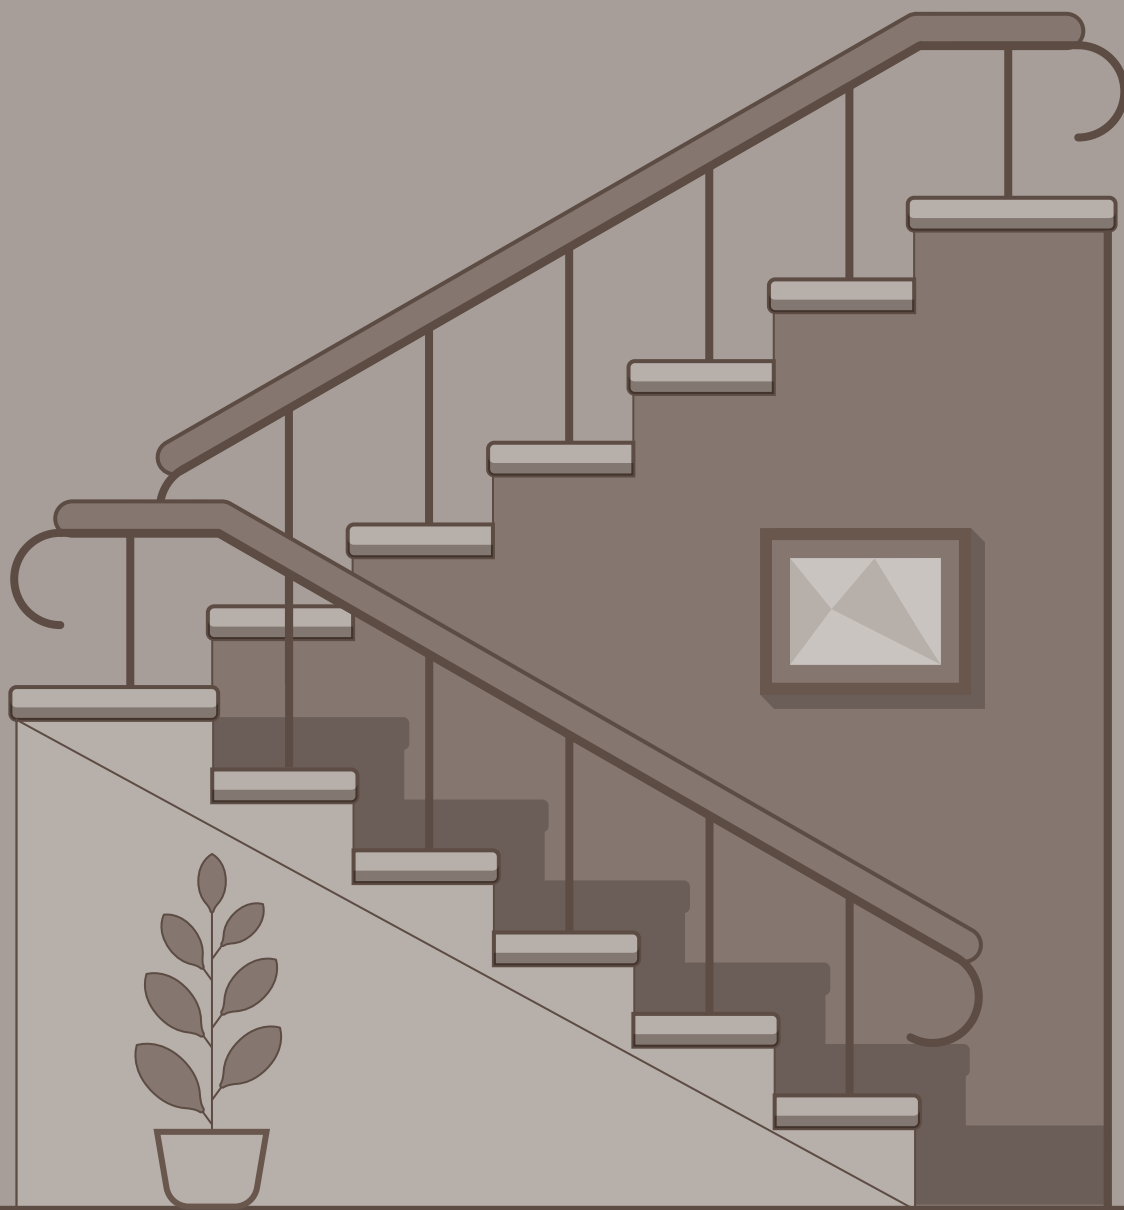

Highly durable, ideal for heavy traffic and commercial areas indoors and outdoors.


Easy and speedy installation. Better than natural stone cutting and finishing on site.

Embossed capsule lines provide extra grip for enhanced safety near the step edge and unique full bull nose edges.


It provides higher strength and durability and offers assurance to replace natural stones in a confident way with the highest abrasion resistance.

Ensures ten times superior surface protection against wear and tear over natural stones.

Available Sizes :

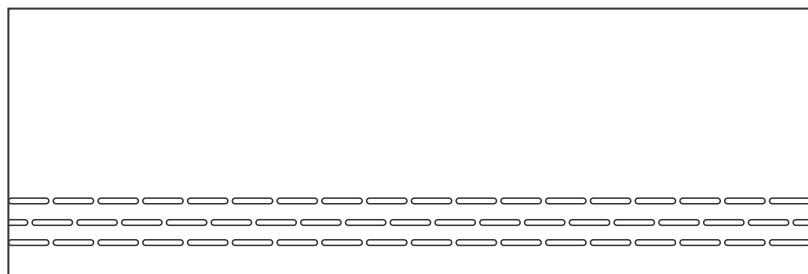

STEP - 300X900MM



RISER - 200X900MM

READY TO INSTALL STEP & RISER

THICKNESS : 10MM

Steps are available in 300x900mm.
These can be used in full size and cut size,
depending on the requirement. While the riser
tiles are available in the convenient
size of 200x900mm





READY TO INSTALL
STEP & RISER

200X900MM | 300X900MM



POLO CREMA - (RISER)



POLO CREMA - (STEP)




POLO CREMA




READY TO INSTALL
STEP & RISER

200X900MM | 300X900MM

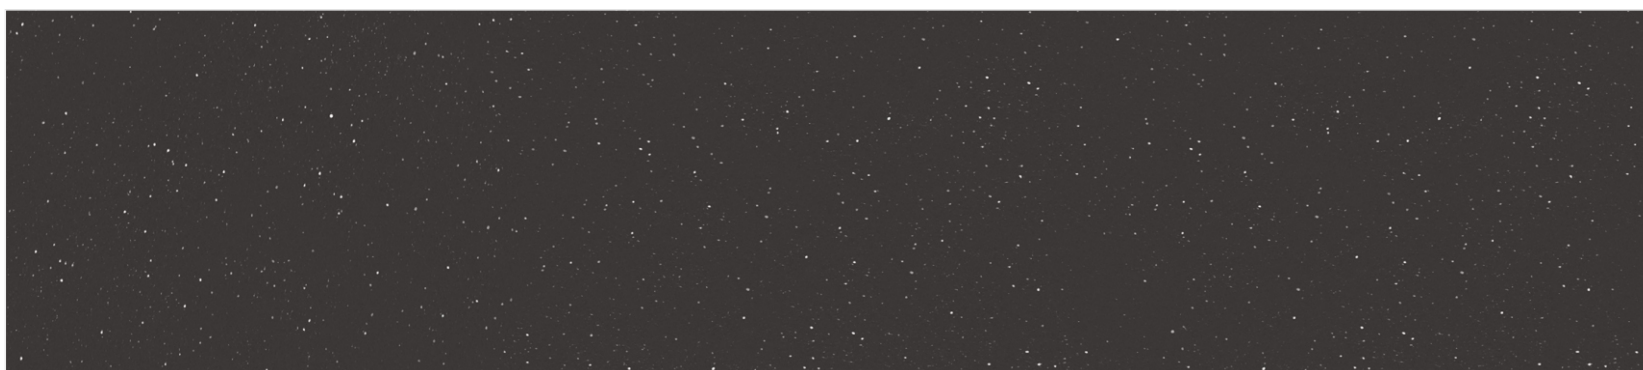

POLO BLACK - (RISER)

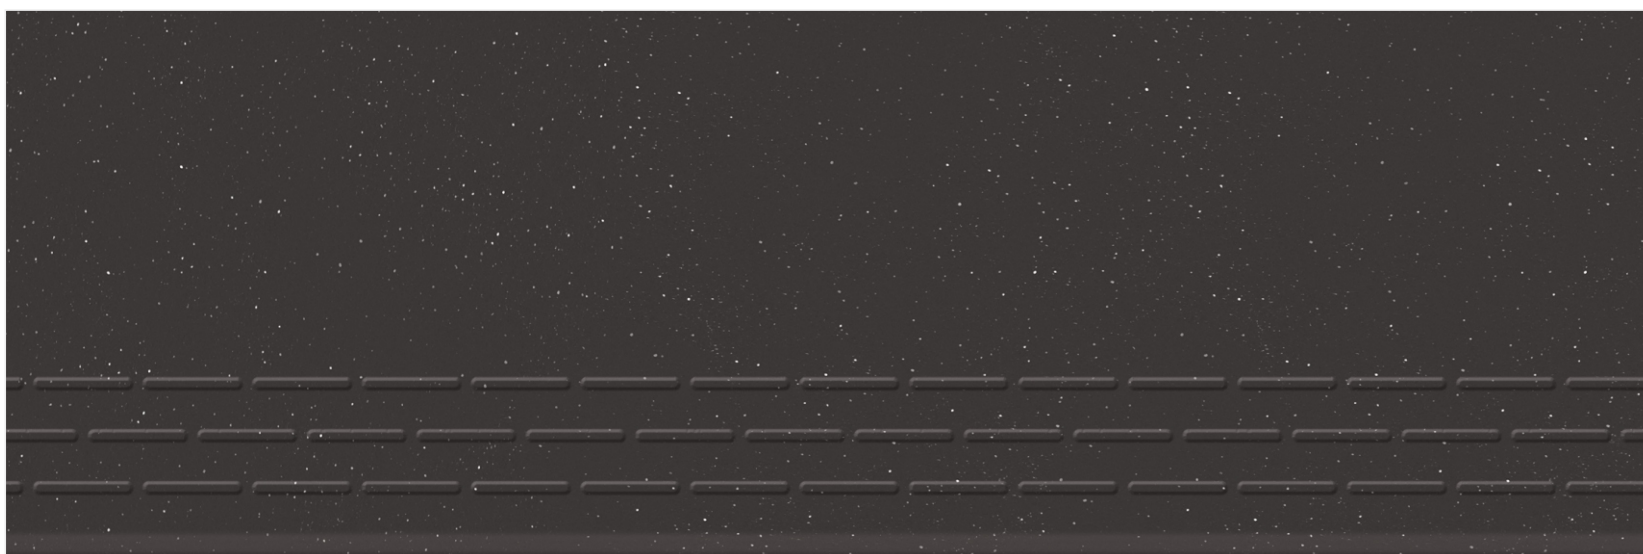

POLO BLACK- (STEP)



POLO BLACK




READY TO INSTALL
STEP & RISER

200X900MM | 300X900MM



POLO BROWN - (RISER)

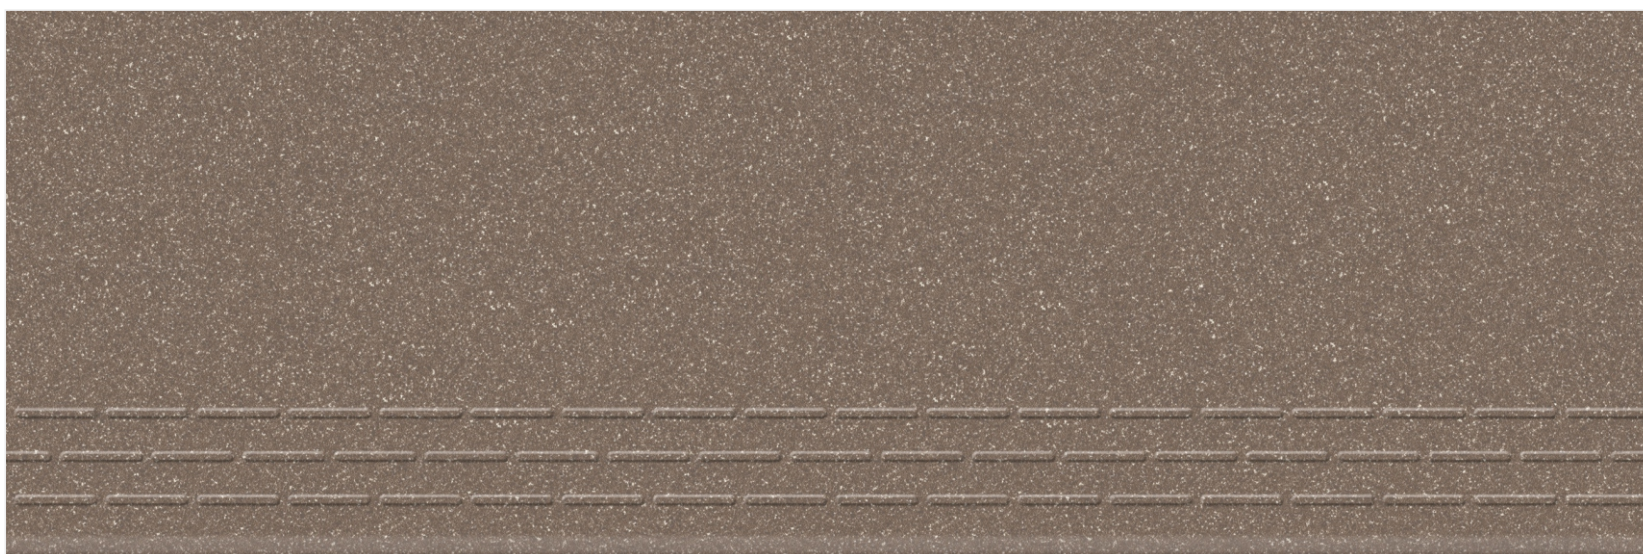

POLO BROWN - (STEP)




POLO BROWN




READY TO INSTALL
STEP & RISER

200X900MM | 300X900MM

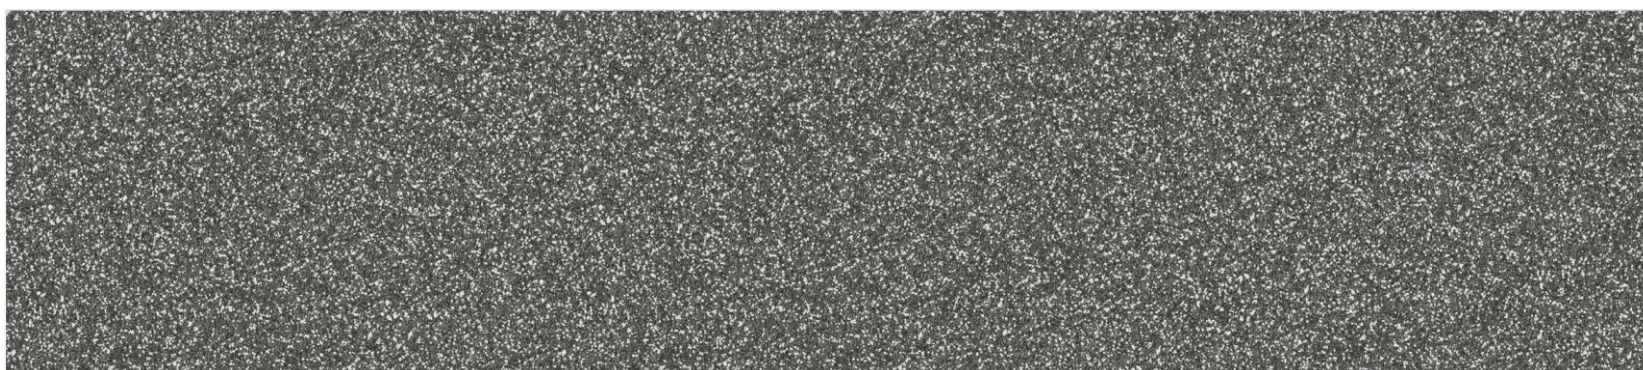

POLO GREY - (RISER)

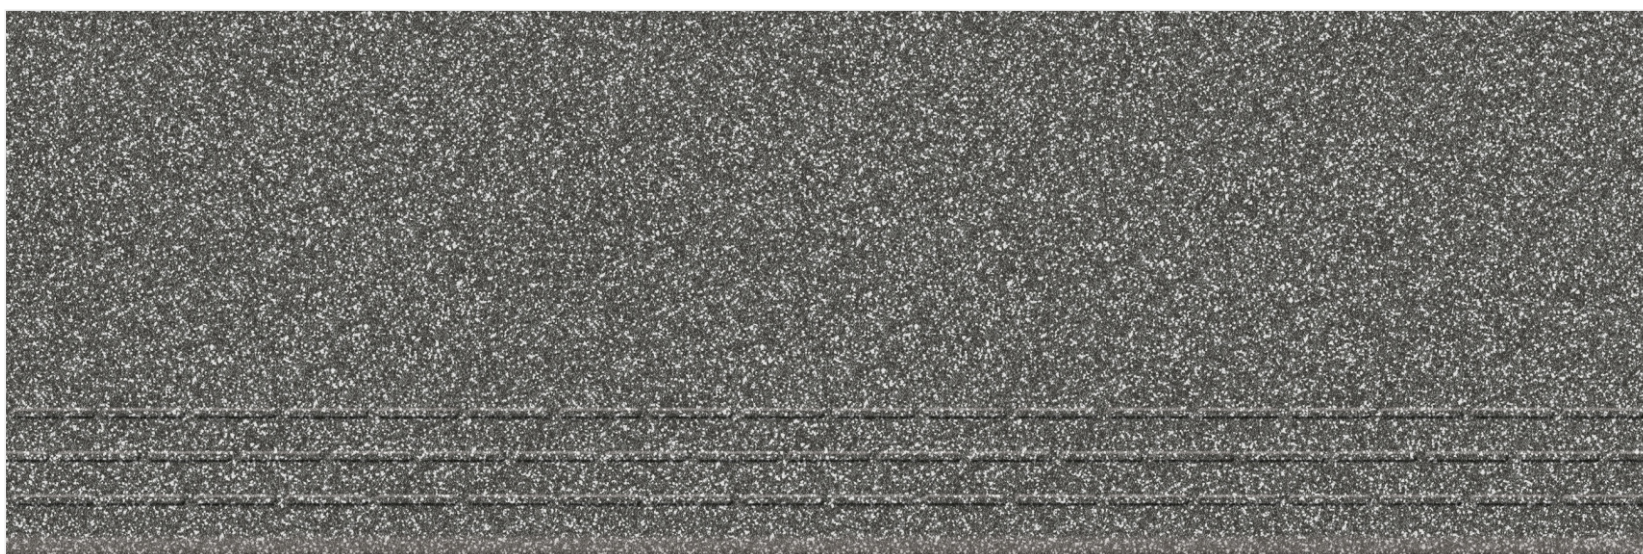

POLO GREY - (STEP)




POLO GREY



READY TO INSTALL
STEP & RISER

200X900MM | 300X900MM

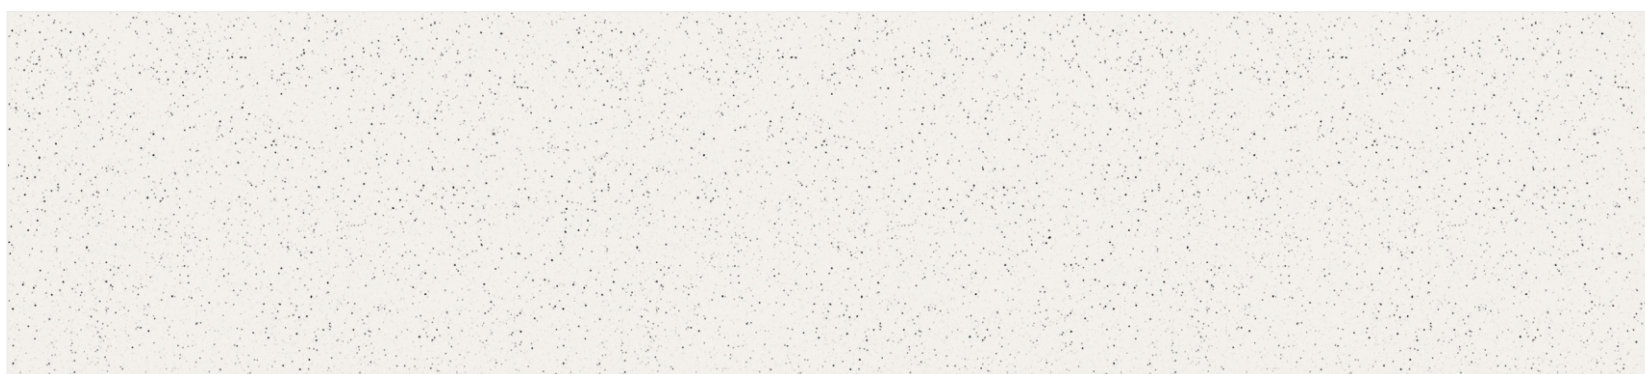

POLO WHITE - (RISER)



POLO WHITE - (STEP)




POLO WHITE



READY TO INSTALL
STEP & RISER

200X900MM | 300X900MM

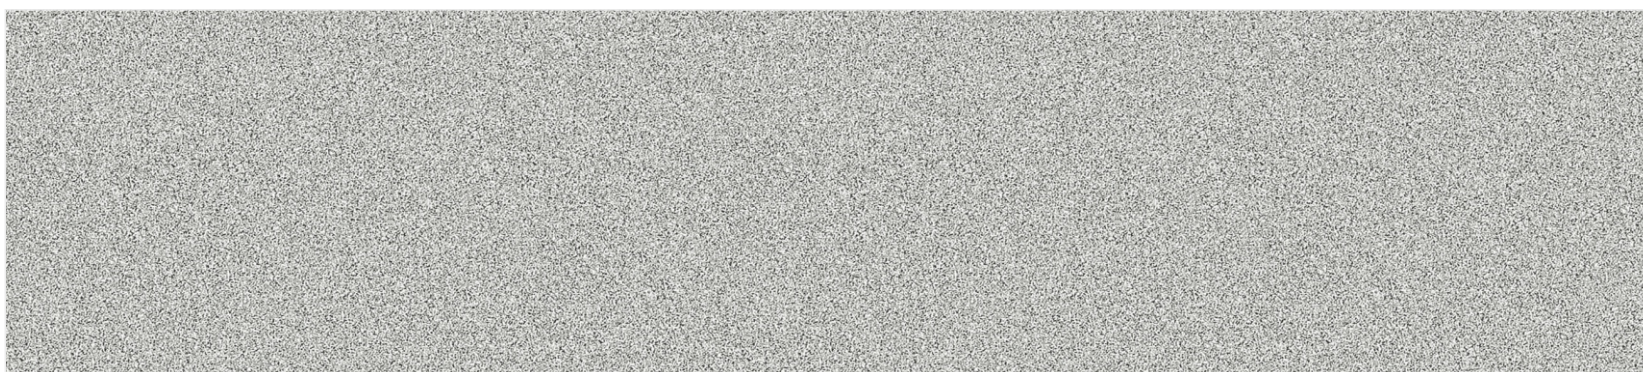

POLO SILVER - (RISER)



POLO SILVER - (STEP)



POLO SILVER

TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF OUR FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	±0.60%	±0.10%	ISO-10545-2
Deviation In Thickness	±5.00%	±2.00%	ISO-10545-2
Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
Rectangularity	±0.60%	±0.10%	ISO-10545-2
Surface Flatness	±0.50%	±0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossmeter
Water Absorption	≤0.50%	E≤0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm ³	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN 101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nill	Nill	ISO-10545-10
Thermal Expansion	<9x10 ⁻⁶	≥ 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance (friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

DISCLAIMER :
We reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors of tiles shown in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.

PACKING DETAILS

FULL BODY STEP AND RISER 5ft.			
SIZE	Sq.Ft.	Packing	Weight
200X900MM	7.75	4 pcs	16.5 kg
300X900MM	11.62	4 pcs	25 kg



VIDEX CERAMICO

Sr. No. 159p1/p2, B/h Ambika Showroom,
Nr. Anita Ceramic, Pipli Road,
Bela Rangpar Morbi.

Mo. : +91 99790 44499