
200X1200MM | 300X1200MM





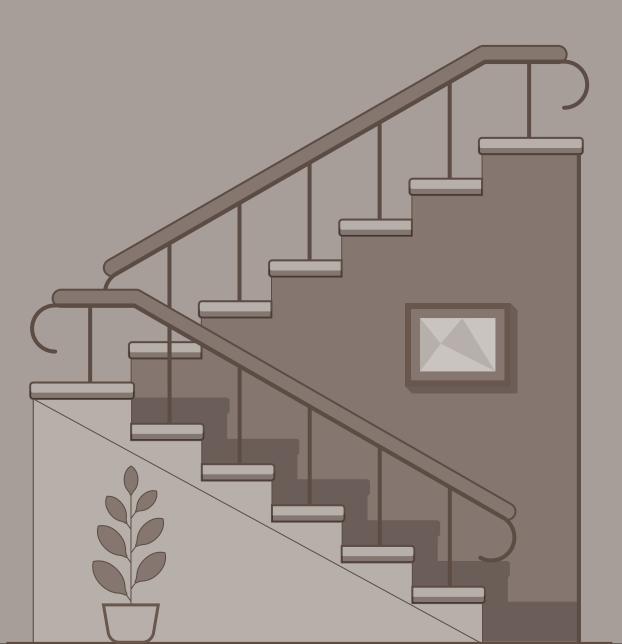

Highly durable, ideal for heavy traffic and commercial areas indoors and outdoors.


Easy and speedy installation. Better than natural stone cutting and finishing on site.

Embossed capsule lines provide extra grip for enhanced safety near the step edge and unique full bull nose edges.

It provides higher strength and durability and offers assurance to replace natural stones in a confident way with the highest abrasion resistance.

Ensures ten times superior surface protection against wear and tear over natural stones.

Available Sizes:

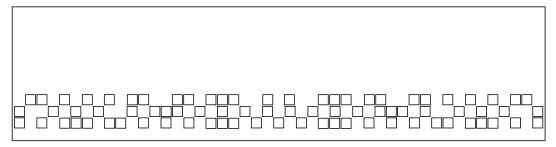

STEP - 300X1200MM



THICKNESS: 10MM

Steps are available in 300x1200mm.
These can be used in full size and cut size,
depending on the requirement. While the riser
tiles are available in the convenient
size of 200x1200mm










200X1200MM | 300X1200MM



12001 (RISER)

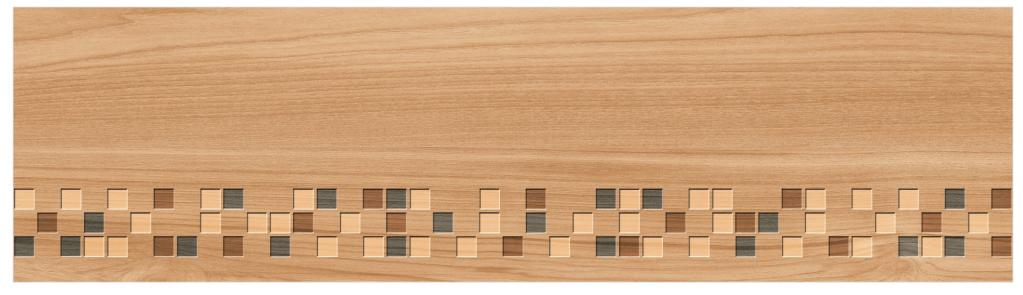







200X1200MM | 300X1200MM



12003 (RISER)










200X1200MM | 300X1200MM



12004 (RISER)

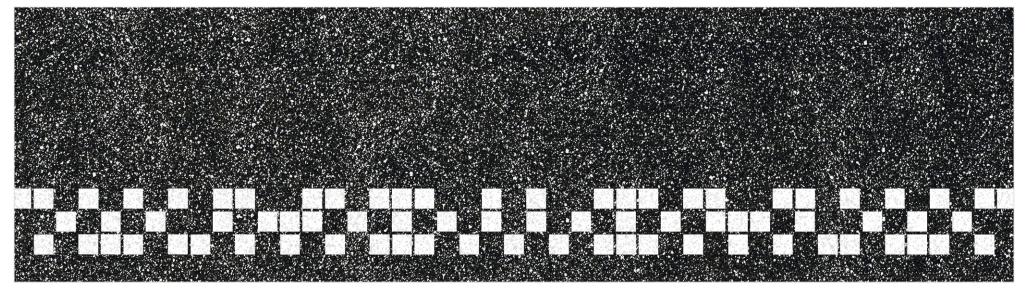








200X1200MM | 300X1200MM



12005 (RISER)

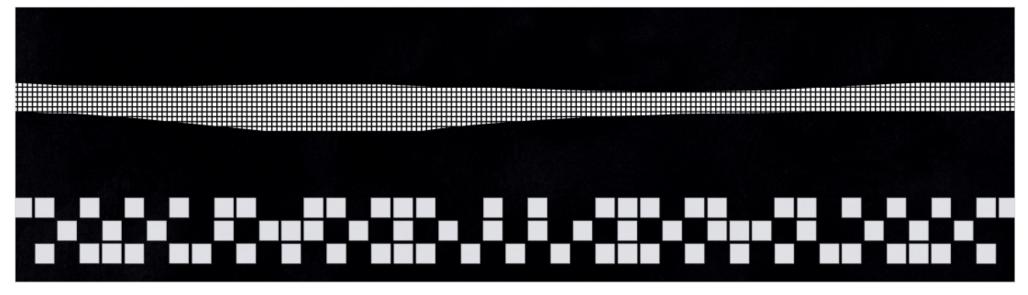









200X1200MM | 300X1200MM

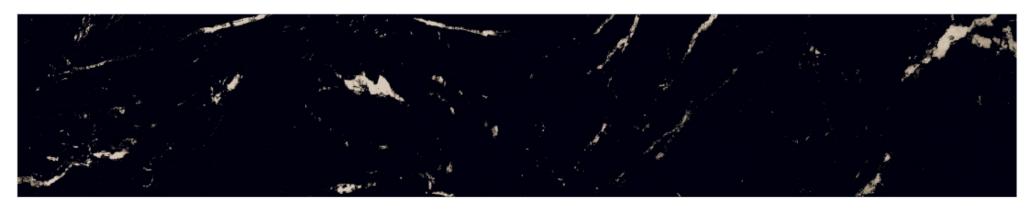

12008 (RISER)

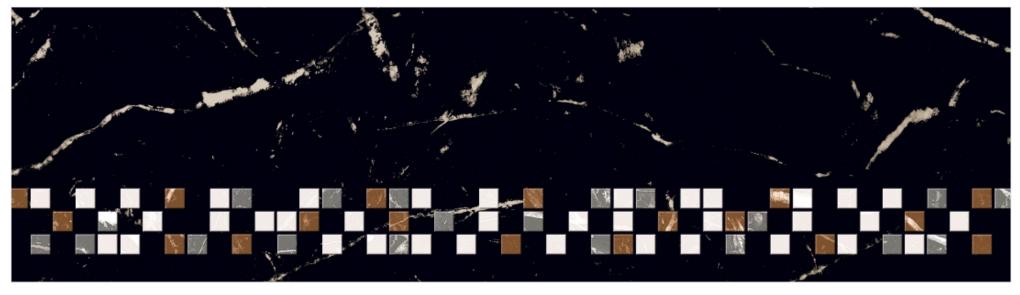







200X1200MM | 300X1200MM



12011 (RISER)









200X1200MM | 300X1200MM



12013 (RISER)











200X1200MM | 300X1200MM

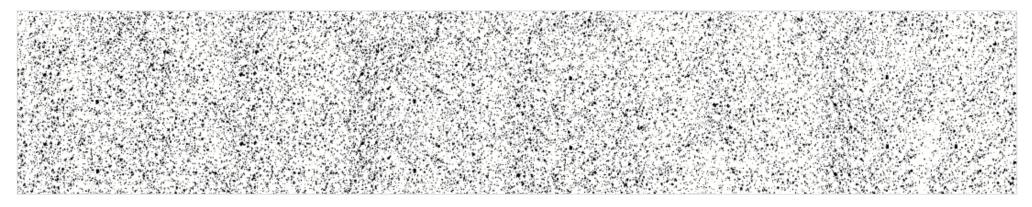

12014 (RISER)

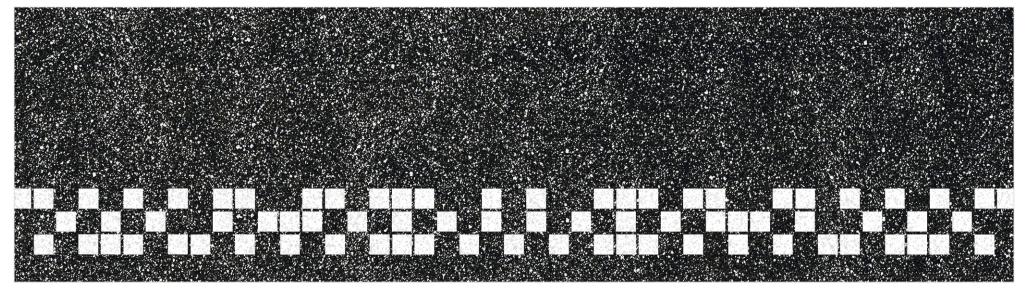








200X1200MM | 300X1200MM



12018 (RISER)

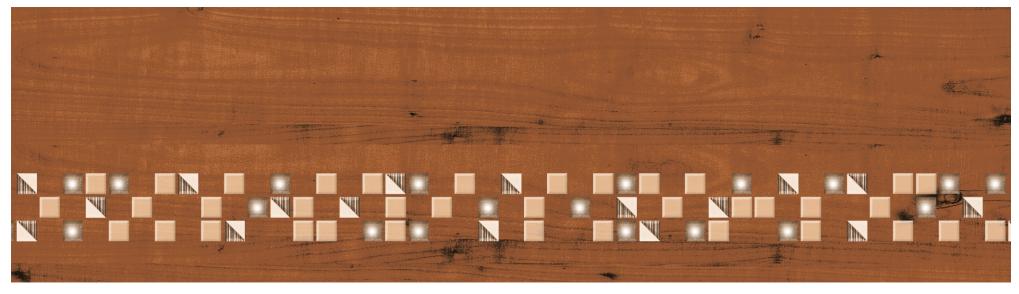







200X1200MM | 300X1200MM



12020 (RISER)











200X1200MM | 300X1200MM



12021 (RISER)

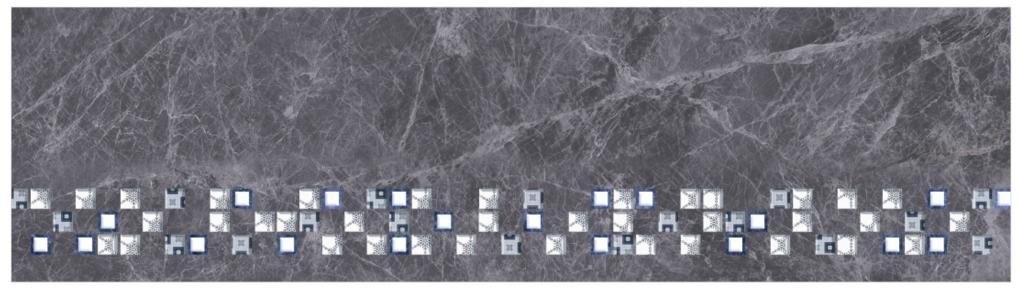

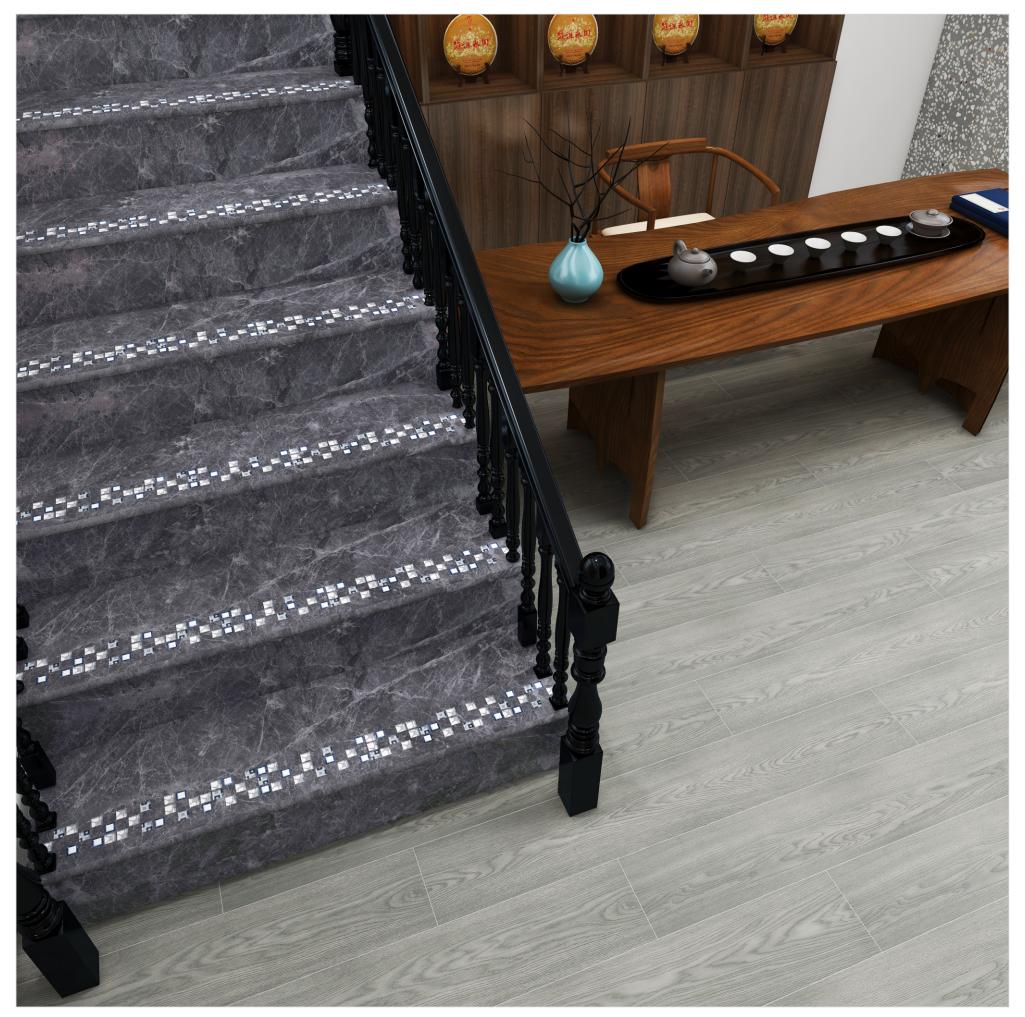







200X1200MM | 300X1200MM



12025 - RISER

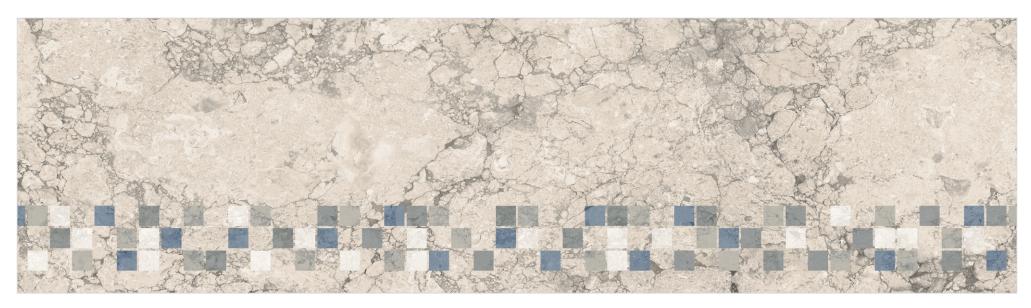

12025 - STEP

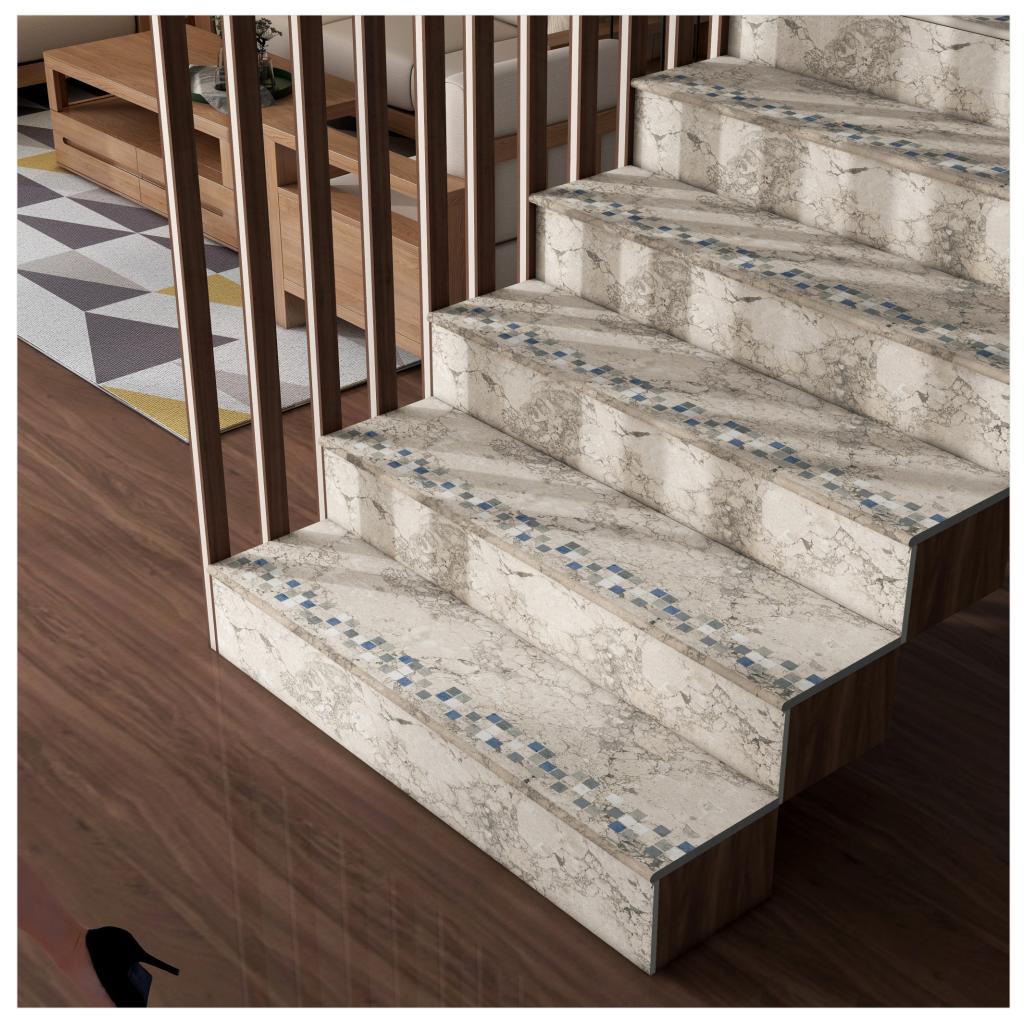






200X1200MM | 300X1200MM



12026 (RISER)

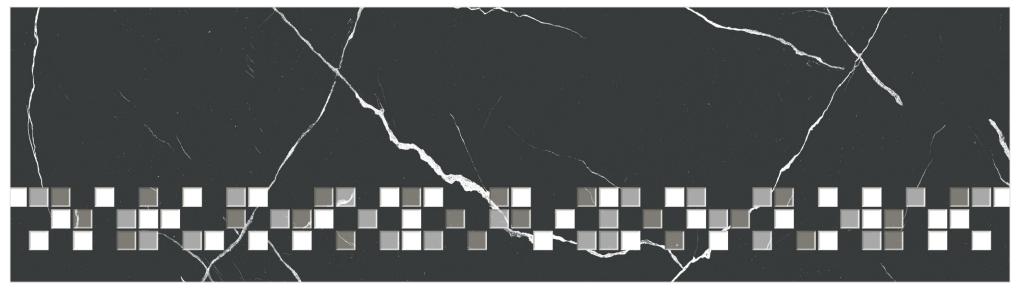



TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP Bla	MEAN VALUE OF OUR FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	±0.60%	±0.10%	ISO-10545-2
Deviation In Thickness	±5.00%	±2.00%	ISO-10545-2
Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
Rectangularity	±0.60%	±0.10%	ISO-10545-2
Surface Flatness	±0.50%	±0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossmeter
Water Absorption	≤0.50%	E≤0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm³	Max. 145mm³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN 101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nill	Nill	ISO-10545-10
Thermal Expansion	<9x10 ⁻⁶	≥ 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance (friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

We reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors of tiles shown in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.

PACKING DETAILS

FULL BODY STEP AND RISER 5ft.				
SIZE	AREA/BOX	Packing	Weight	
200X1200MM	0.72 Sq. Mtr.	3 Pcs	14 kg	
300X1200MM	1.08 Sq. Mtr.	3 Pcs	21 kg	



VIDEX CERAMICO

Sr. No. 159p1/p2, B/h Ambika Showroom, Nr. Anita Ceramic, Pipli Road, Bela Rangpar Morbi.

Mo.: +91 99790 44499